


### FEATURES

### Specs :

Nominal Impedance	4 Ω	Free air resonance, Fs	1300 Hz
DC resistance, Re	3.0 Ω	Sensitivity (2.83 V / 1 m)	87 dB
Voice coil inductance, Le	... mH	Mechanical Q-factor, Qms	...
Effective piston area, Sd	... cm <sup>2</sup>	Electrical Q-factor, Qes	...
Voice coil diameter	12.4 mm	Total Q-factor, Qts	...
Voice coil height	1.2 mm	Force factor, Bl	... Tm
Air gap height	1.5 mm	Rated power handling*	10 W
Linear coil travel (p-p)	0.3 mm	Magnetic flux density	0.97 T
Moving mass incl. air, Mms	... g	Magnet weight	3.4 g
		Net weight	0.014 kg

\* IEC 268-5, high-pass Butterworth, 2600 Hz, 12 dB/oct

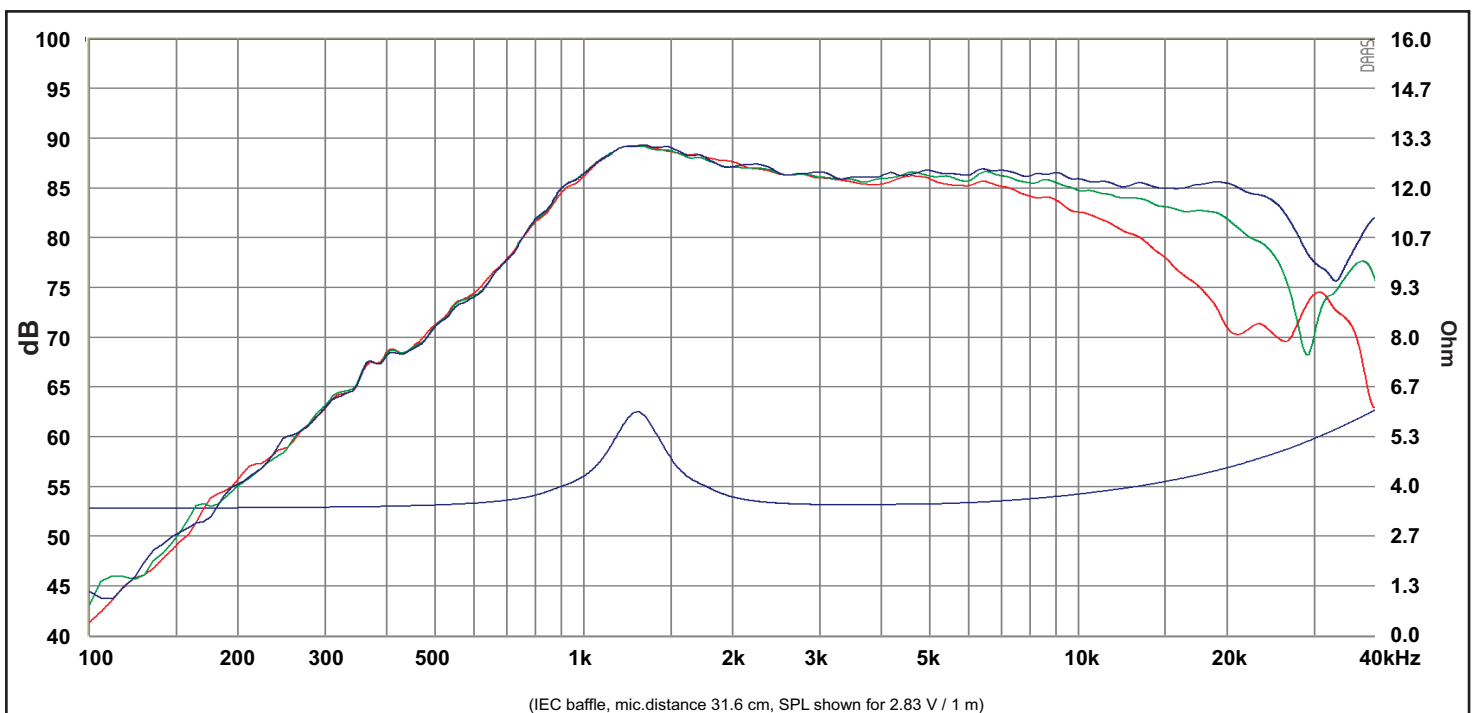

Response Curve :

— (Blue) : on axis

— (Green) : 30° off-axis

— (Red) : 60° off-axis